




# HYDRO-LEK

## REMOTE HANDLING SPECIALISTS

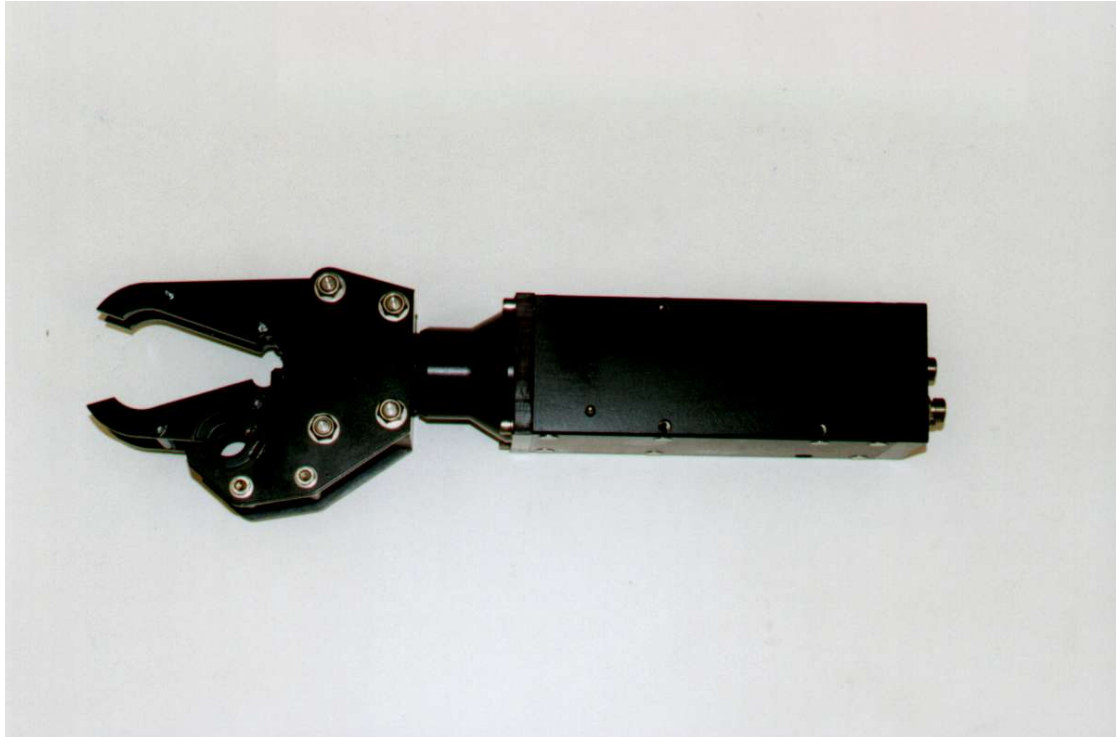


### HLK-2020 Continuous Jaw Rotate Actuator:

The HLK-2020 Continuous Jaw Rotate actuator is a rugged unit fitted to all HLK heavy-duty arms. Rotation is via a Geroler motor, which produces 36Nm of torque. The jaw actuator assembly also uses many of the parts found in the smaller 2010 actuator. All the control ports are accessed through the rear of the 76mm square housing, with mounting along the sides via standard HLK M6 screw inserts.

#### Specification:

Dimensions	Length	428mm
	Height	130mm
	Width	85mm
Capacities	Jaw rotate	Continuous
	Torque at 140 bar (across motor ports)	36Nm
	Jaw open/close	154mm - 0mm
	Cutter max (polypropylene rope)	19mm
Weight	Weight in air	7Kg
	Weight in water	5Kg
Construction	316 SS	
	HE 30 Hard anodised aluminium	
Max working pressure		210 bar
Ports		7/16 SAE


428.0

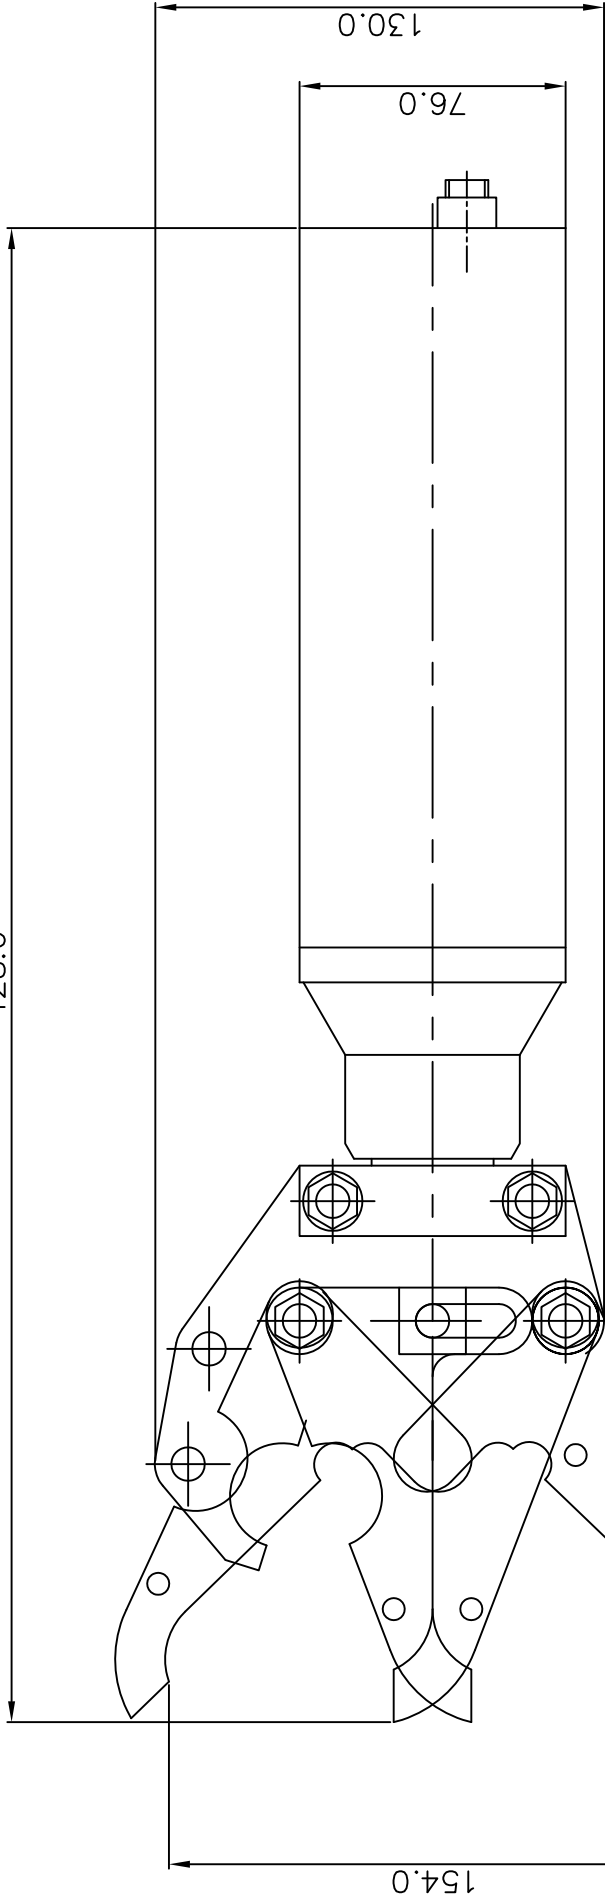

SPECIFICATION : -

JAW ROTATE  
 JAW OPEN / CLOSE  
 TORQUE AT 140 BAR  
 CUTTER MAX. (POLYPROPELENE)  
 WEIGHT IN AIR  
 WEIGHT IN WATER  
 MAX. WORKING PRESSURE  
 PORTS  
 MATERIALS: -

CONTINUOUS  
 154 - 0  
 50 Nm  
 ø19 mm  
 7 Kg  
 5 Kg  
 210 bar  
 7/16" SAE  
 HE 30 HARD ANODISED ALUMINIUM BLOCK  
 316 S.S. JAWS ASSY.

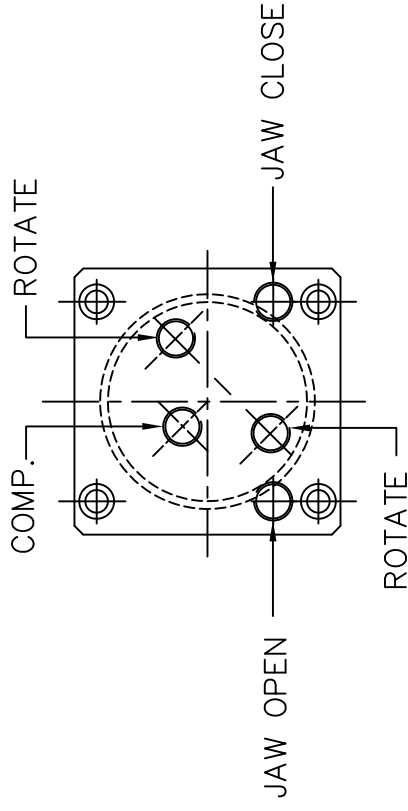

VIEW ON CONN. PORTS

HE 30 HARD ANODISED ALUMINIUM BLOCK

316 S.S. JAWS ASSY.

HYDRO-LEK LTD.	HLK-2020 CONT. JAW ROTATE
ISS. DATE: -	MAT: -
CHKD BY: -	REV. NO: -
DRAWN BY: - JW 18/8/99	DRG. NO: - CMR 2020/DATA
	C.M. INNOVATIONS LTD.