



HYDRO-LEK

REMOTE HANDLING SPECIALISTS




HLK-2040 Heavy Duty Grabber

The HLK-2040 Heavy Duty Grabber is capable of gripping pipe of up to 320 mm diameter. Rotation is via a Geroler motor, which produces 36Nm of torque and provides continuous rotation of the grabber. All the control ports are accessed through the rear of the 76mm square housing, with mounting along the sides via standard HLK M6 screw inserts.

Specification:

Dimensions	Length	694 mm
	Height	405 mm
	Width	91 mm
Capacities	Jaw rotate	Continuous
	Torque at 140 bar	36Nm
	Jaw open/close	320 mm - 0 mm
Weight	Weight in air	12 Kg
	Weight in water	10 Kg
	Construction	316 SS HE 30 Hard anodised aluminium
Max working pressure		210 bar
Ports		7/16 SAE


694

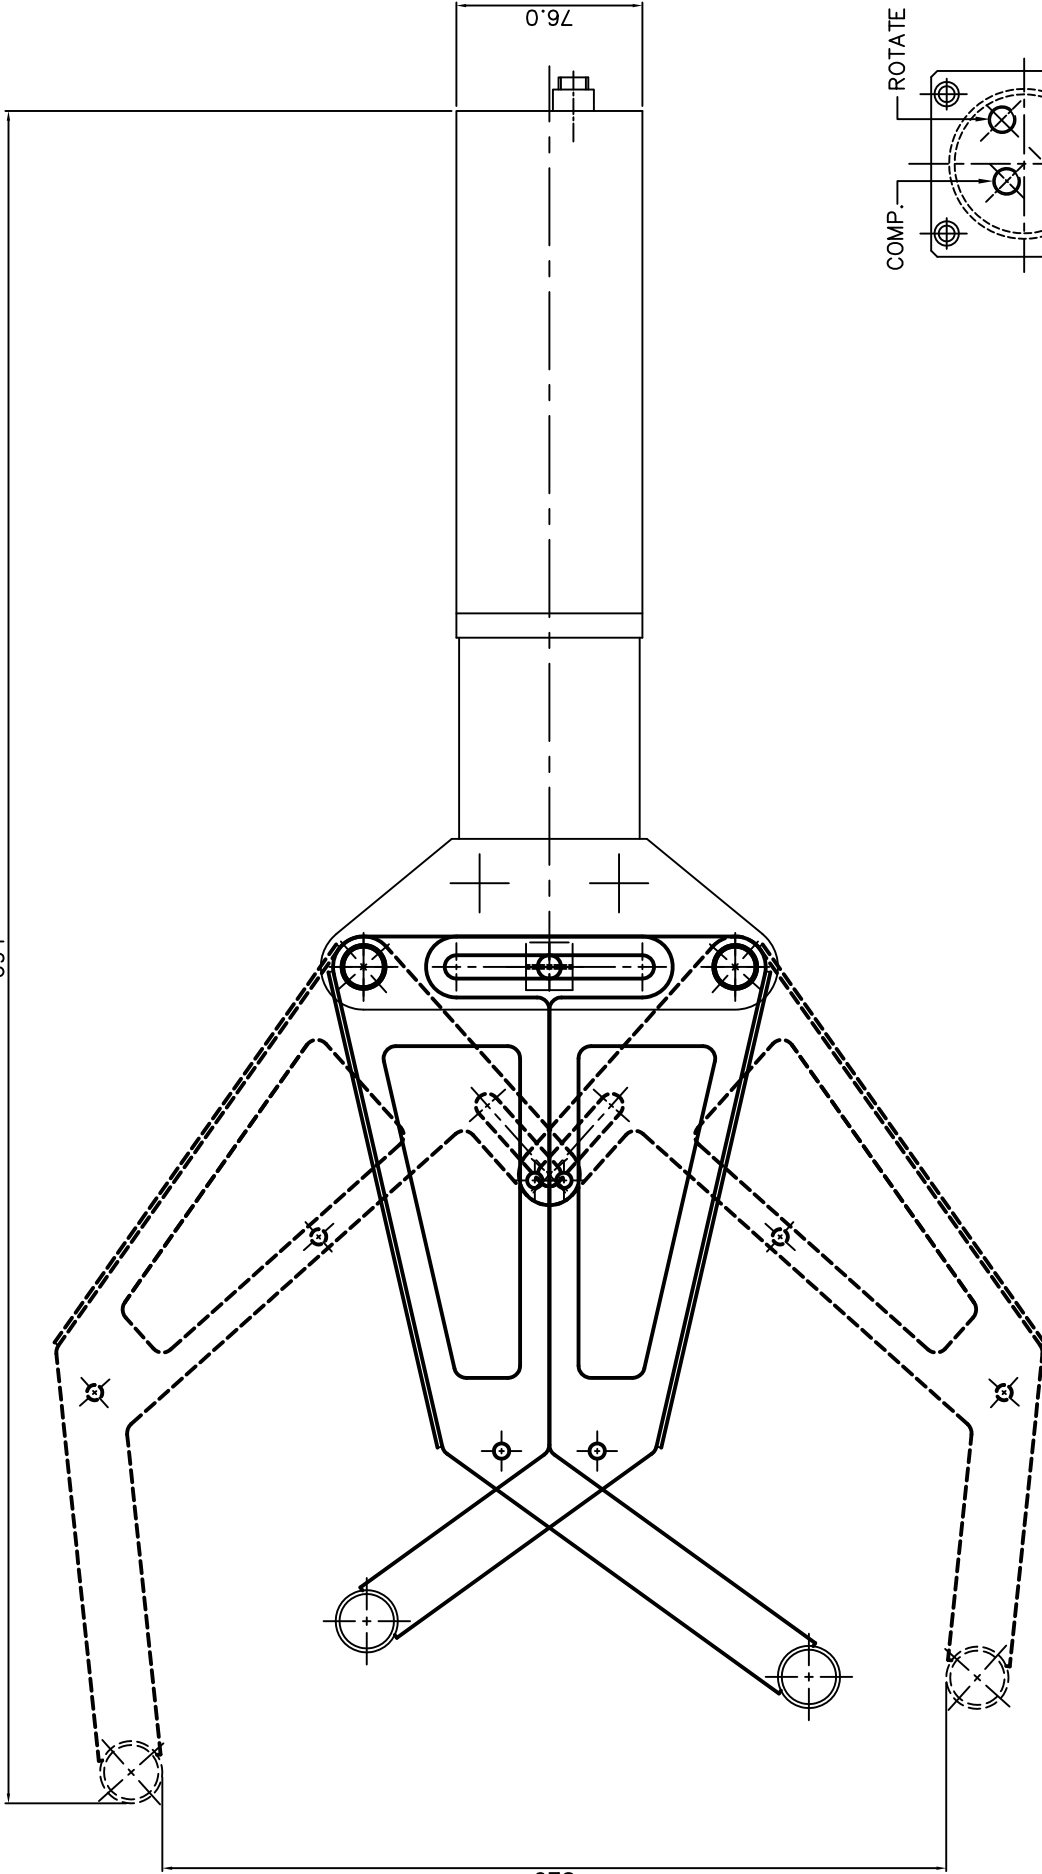

SPECIFICATION :-

JAW ROTATE
 JAW OPEN / CLOSE
 TORQUE AT 140 BAR
 WEIGHT IN AIR
 WEIGHT IN WATER
 MAX. WORKING PRESSURE
 PORTS
 MATERIALS:-

CONTINUOUS
 320 - 0
 36 Nm
 12.0 Kg
 10.0 Kg
 210 bar
 7/16" SAE
 HE 30 HARD ANODISED ALUMINIUM BLOCK
 316 S.S. JAWS ASSY.

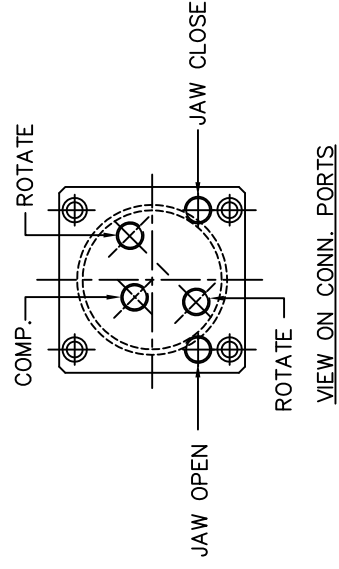

VIEW ON CONN. PORTS

HYDRO-LEK LTD.	HLK-2040 H.D. GRABBER
ISS. DATE:-	MAT:-
CHKD BY:-	REV. NO:-1
DRAWN BY:-	PR 4/2/02
	TARGET DESIGNS