




HYDRO-LEK

REMOTE HANDLING SPECIALISTS

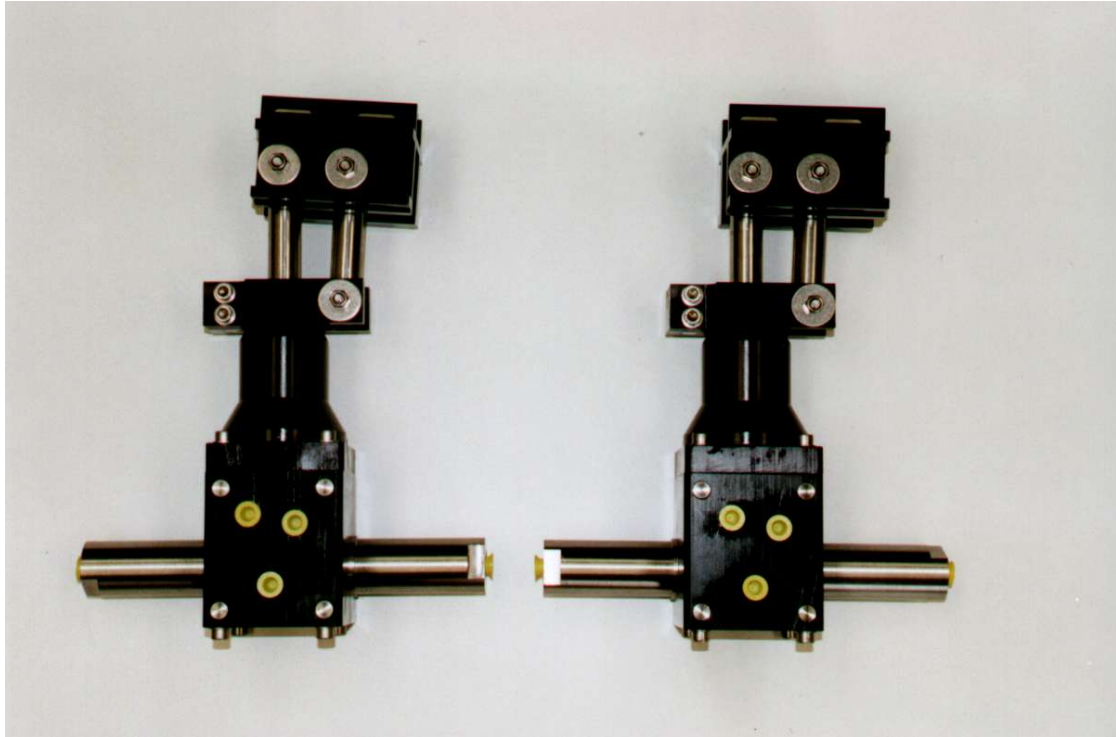


HLK-2150 Pan & Tilt:

The HLK-2150 Pan & Tilt is now considered to be one of the longest serving reliable units in service. Its unique slip ring and tilt action ensures the camera swept arc is kept to a minimum. Since serial number 360 a new adjustable camera tilt clamp system has been used to improve rigidity. A retro fit kit to upgrade all previous models is also available.

Specification:

Dimensions	Height	300mm
	Width (360° rotation)	226mm
	Depth	76mm
Function	Tilt	120°
	Pan	360° max
Weight	Weight in air	4.5Kg
	Weight in water	3.3Kg
Material	316 SS	
Hydraulics	HE 30 Hard anodised aluminium	
	Max working pressure	210 bar
Ports		7/16 SAE / 1/8 NPT

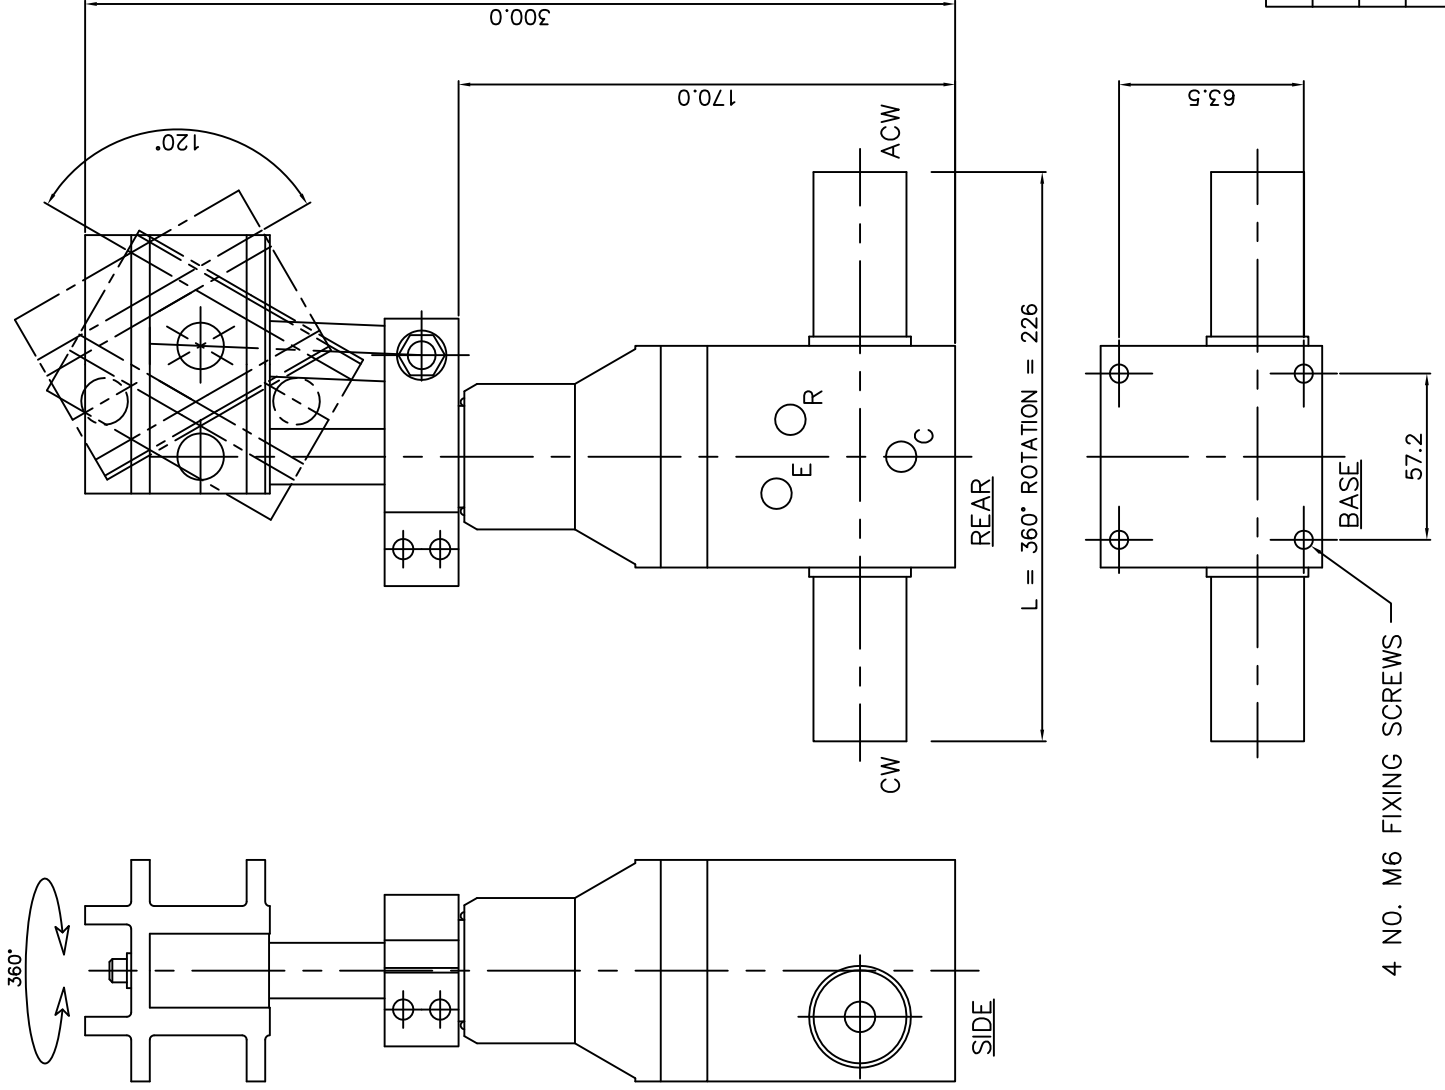

PORTS

- E = TILT EXTEND
- R = TILT RETRACT
- C = COMPENSATION
- CW = PAN CLOCKWISE
- ACW = PAN C/CLOCKWISE

SPECIFICATION

- PAN ANGLE 360°
- TILT ANGLE 120°
- MAX. WORKING PRESS. 210 BAR
- PAN TORQUE 100 NM
- TILT TORQUE 120 NM
- OVERALL HEIGHT 300
- OVERALL WIDTH 226
- WEIGHT IN AIR 4.5 KG
- WEIGHT IN WATER 3.3 KG
- PORTS 1/8" NPT - 7/16" SAE
- MATERIALS: - HE 30 ALUMINIUM
316 ST. STEEL

HYDRO-LEK LTD		HLK-2150 PAN AND TILT UNIT
ISS. DATE: -	MAT: - VARIOUS	
CHKD BY: -	REV. NO: -	DRG. NO: - CMR 2150/DATA
DRAWN BY: - JW 18/8/99		C.M. INNOVATIONS LTD.

4 NO. M6 FIXING SCREWS