



HYDRO-LEK

REMOTE HANDLING SPECIALISTS




HLK-90130 Power Pack:

The HLK-90130 Power pack is a three phase powered unit which can be supplied for operation on either 440 or 660 Volts. The motor is fitted within an oil-filled, pressure compensated housing, which is separate to the pump and reservoir. The pump has an oil filter fitted to prevent contamination from being circulated through the hydraulic system.

Specification:

Dimensions	Overall length	268mm
	Motor diameter	120mm
Weight	Weight in air (Oil Filled)	8.0Kg
	Weight in water (Oil Filled)	5.0Kg
Electrical	Supply Voltage	440/660 Volts 3 phase
	Power	0.75KW (nom)
Output	Pressure	140 BAR (nom)
		210BAR (max)
	Flow	1.25L/min
	Ports	1/8"NPT
Construction	HE 30 Aluminium	
	Hard Black Anodised	

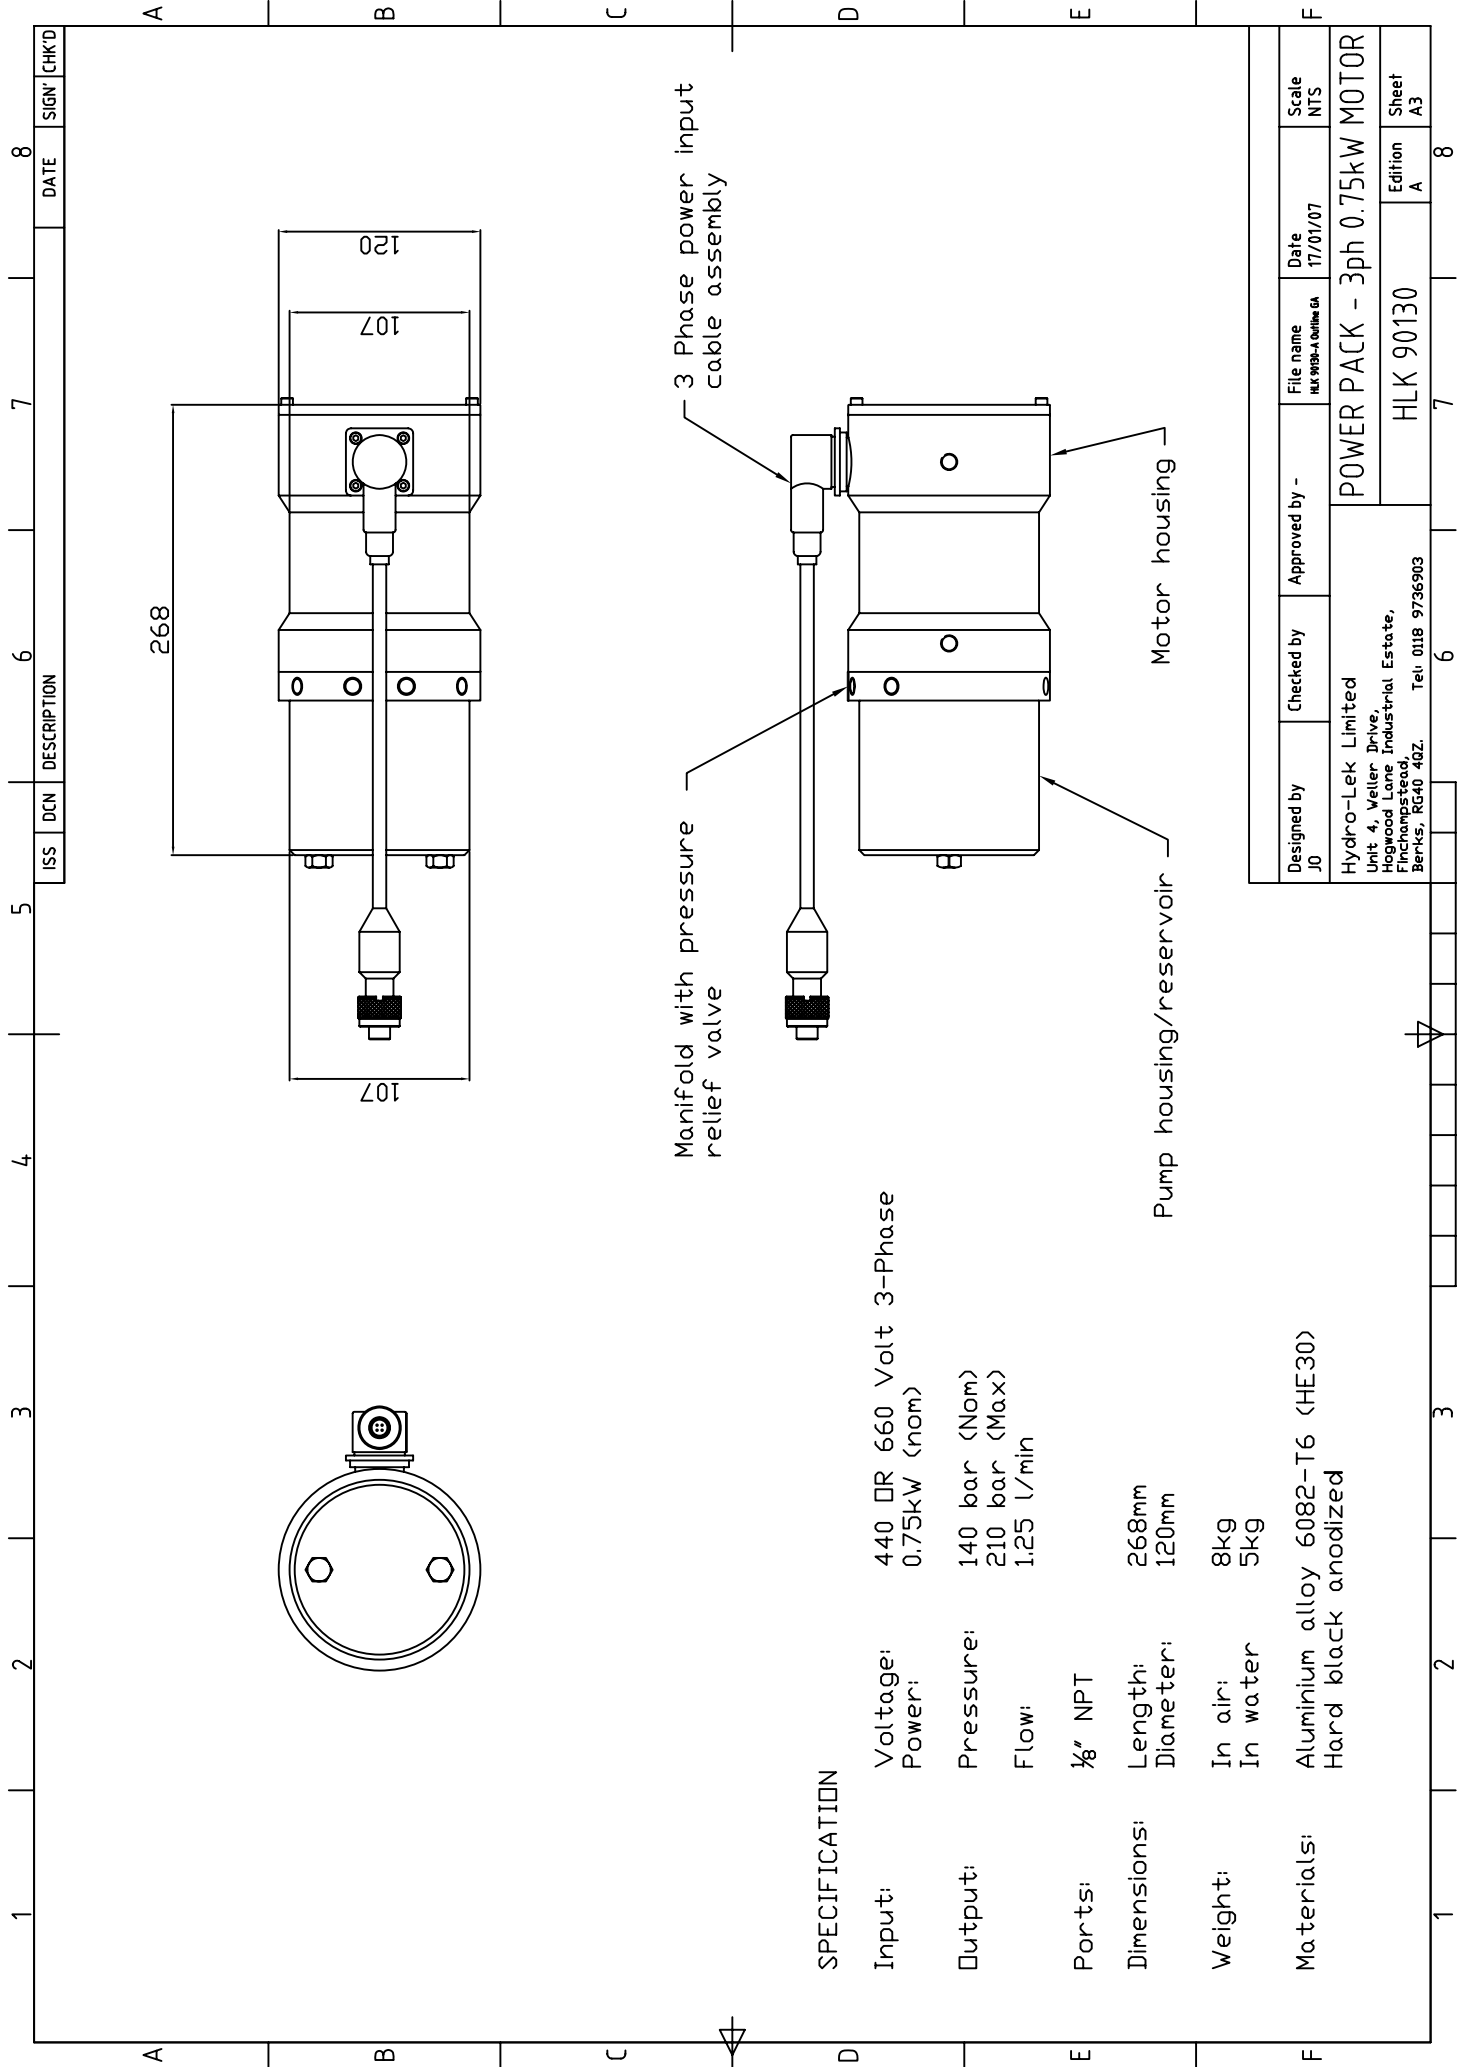

ISS	DCN	DESCRIPTION	DATE	SIGN' CHK'D
5			7	8

Designed by	Checked by	Approved by -	File name	Date	Scale
J0			HLK 90130-A.dwg	17/01/07	NTS
Hydro-Lek Limited Unit 4, Weller Drive, Hogwood Lane Industrial Estate, Finchampstead, Berks. RG40 4QZ. Tel: 0118 9736903			POWER PACK - 3ph 0.75kW MOTOR		
			HLK 90130	Edition A	Sheet A3

SPECIFICATION

Input:	Voltage: 440 DR 660 Volt 3-Phase
	Power: 0.75kW (nom)
Output:	Pressure: 140 bar (Nom)
	210 bar (Max)
	Flow: 1.25 l/min
Ports:	1/8" NPT
Dimensions:	Length: 268mm
	Diameter: 120mm
Weight:	In air: 8kg
	In water: 5kg
Materials:	Aluminium alloy 6082-T6 (HE30)
	Hard black anodized

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---