



INNOVATIVE DESIGN ENGINEERING




HLK-90130 Power Pack:

The HLK-90130 Power pack is a three phase powered unit which can be supplied for operation on either 440 or 660 Volts. The motor is fitted within an oil-filled, pressure compensated housing, which is separate to the pump and reservoir. The pump has an oil filter fitted to prevent contamination from being circulated through the hydraulic system.

Specification:

Dimensions	Overall length	268mm
	Motor diameter	120mm
Weight	Weight in air (Oil Filled)	8.0Kg
	Weight in water (Oil Filled)	5.0Kg
Supply	Voltage	440/660 Volts 3 phase
	Power	0.75KW (nom)
Output	Pressure	140 BAR (nom)
		210BAR (max)
	Flow	1.25L/min
	Ports	1/8" NPT
Construction	HE 30 Hard Anodised aluminium	

Hydro-Lek Ltd. Unit 4, Weller Drive, Hogwood Lane Ind. Estate Finchampstead Berks U.K. RG40 4QZ
Telephone: +44(0) 1189 736903 Fax: +44(0) 1189 736915
Web: <http://www.hydro-lek.com> Email: enquiries@hydro-lek.com

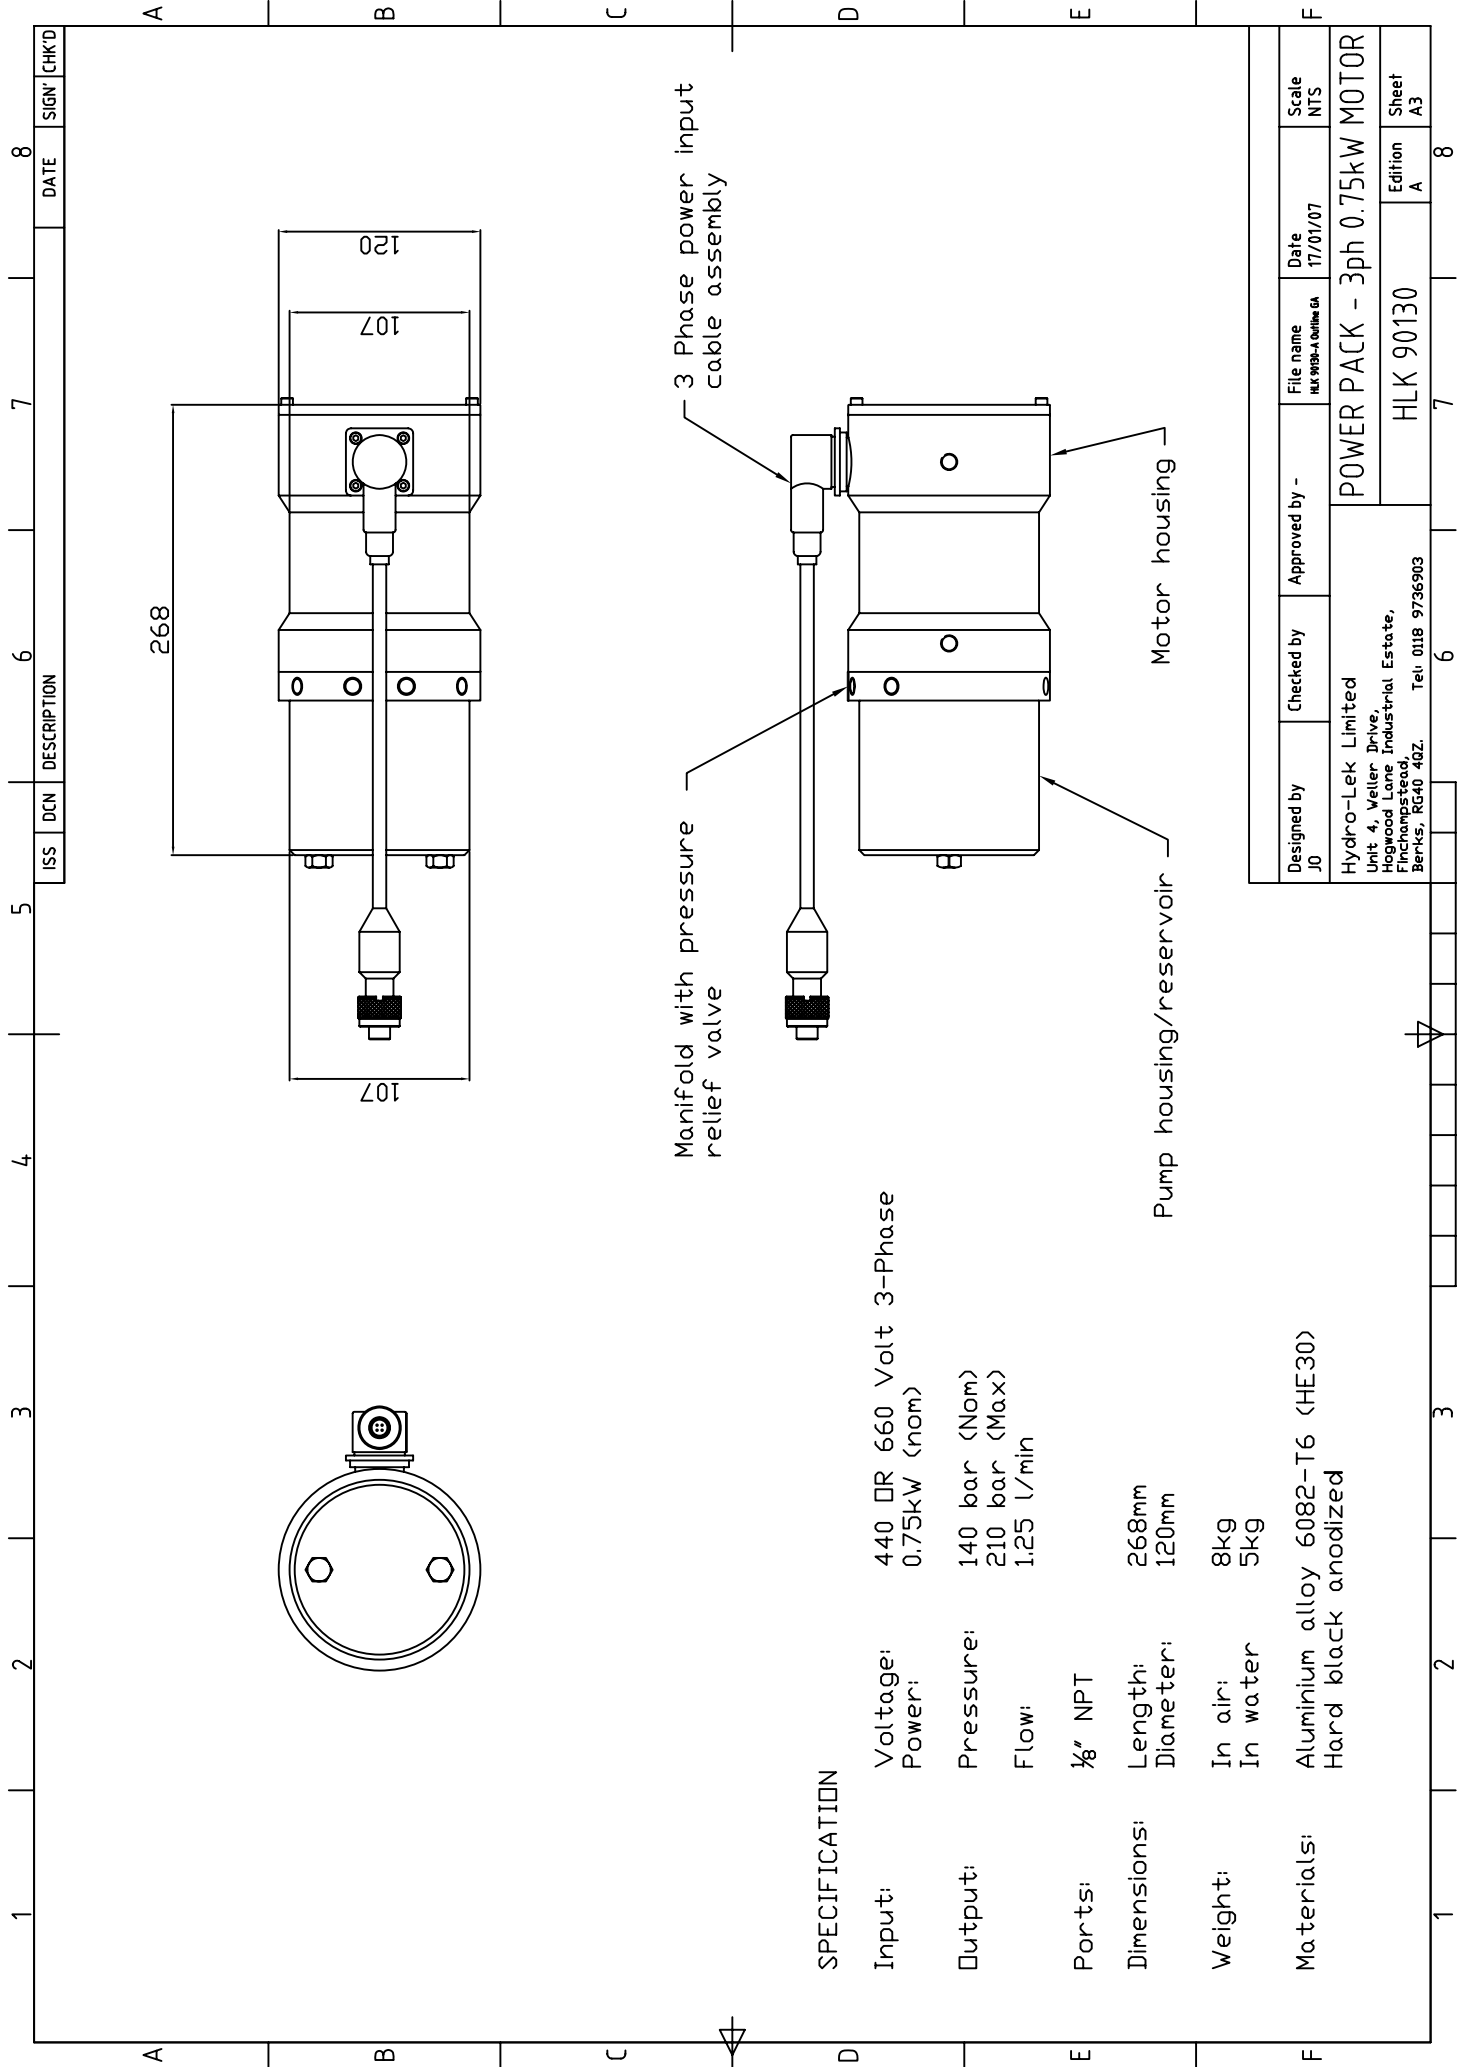

ISS	DCN	DESCRIPTION	DATE	SIGN' CHK'D

1 2 3 4 5 6 7 8

SPECIFICATION

Input: Voltage: 440 DR 660 Volt 3-Phase
 Power: 0.75kW (nom)

Output: Pressure: 140 bar (Nom)
 210 bar (Max)
 Flow: 1.25 l/min

Ports: 1/8" NPT

Dimensions: Length: 268mm
 Diameter: 120mm

Weight: In air: 8kg
 In water: 5kg

Materials: Aluminium alloy 6082-T6 (HE30)
 Hard black anodized

Designed by JO	Checked by	Approved by -	File name HLK 90130-A.dwg/HLK 90130.dwg	Date 17/01/07	Scale NTS
Hydro-Lek Limited Unit 4, Weller Drive, Hogwood Lane Industrial Estate, Finchampsstead, Berks. RG40 4QZ. Tel: 0118 9736903			POWER PACK - 3ph 0.75kW MOTOR		
			HLK 90130	Edition A	Sheet A3

5 6 7 8

4 5 6 7 8

3 4 5 6 7 8

2 3 4 5 6 7 8

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8