



HYDRO-LEK

REMOTE HANDLING SPECIALISTS







HLK-33600 4" Cutter:

The HLK-33600 4" Cutter is a self-contained grab, feed and cut unit, which for a weight of only 12Kg can cut pipe, cable or grout hose. This is a significant weight reduction on standard anvil cutters. It can be controlled using standard Hydro-Lek systems or directly from a work class ROV. Constructed principally from 316 stainless steel, the grab grips around the item to be cut, then with the cutter disc rotating, it feeds on to the work piece at a controlled rate to make the cut.

Specification:

Dimensions	Length	580mm
	Height (less disc)	350mm
	Width	196mm
Function	Cutting disc size	<14" (355mm)
	Rotational Speed	400-1000rpm
	Grab	110mm - 0mm
Weight	Weight in air	12Kg
	Weight in water	10Kg
	Construction	316 SS
Hydraulics	Max working pressure	210 bar
	Min Flow	8Litres / Min.
	Max Flow	21Litres / Min
Ports		1/8 NPT / 3/8 BSP

Specification subject to change without prior notification

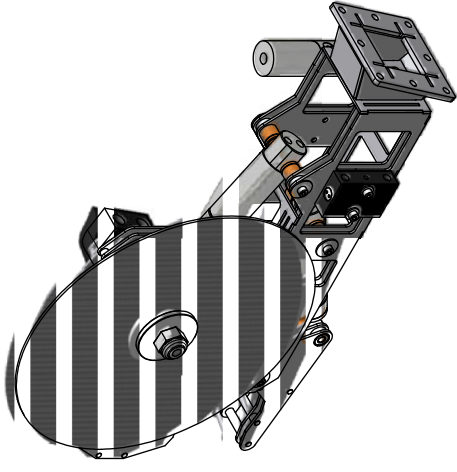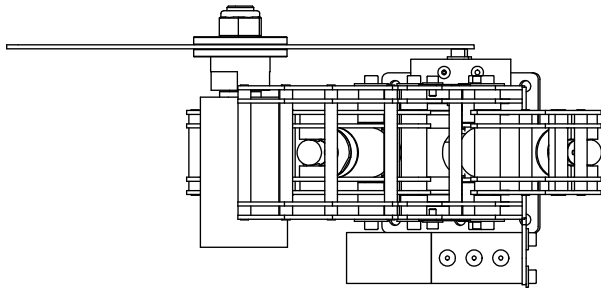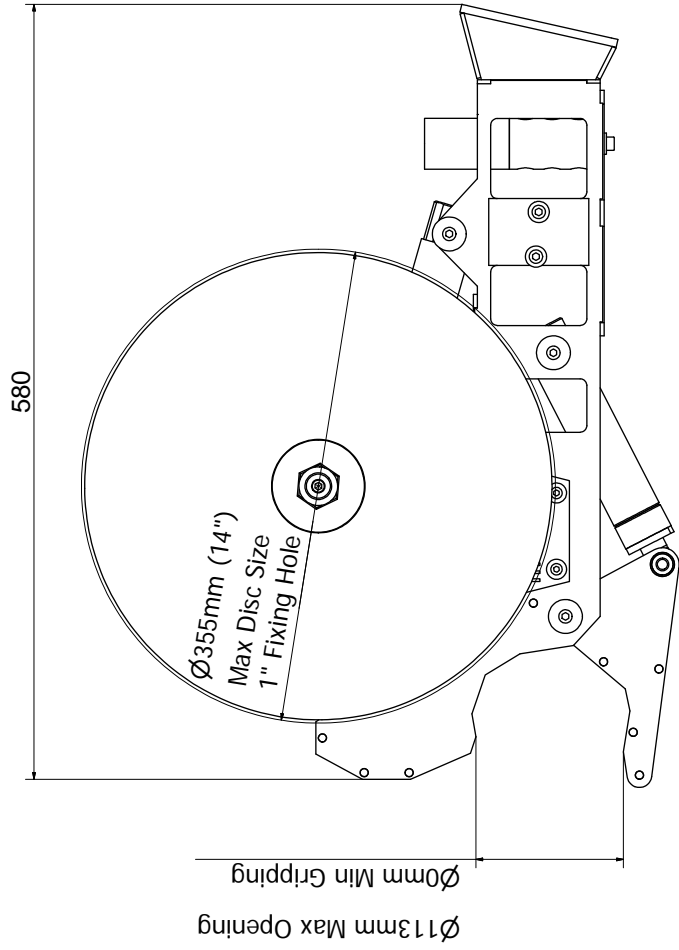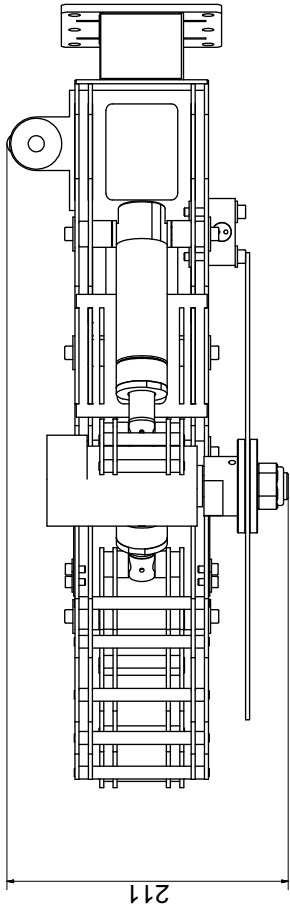

SPECIFICATION

MAX Jaw Opening	113mm
MAX Cutting size	110mm
MIN Cutting Size	0mm
Cutter rotational Speed	400 - 1000 RPM
Weight (in air)	12Kg
Weight (in water)	10Kg
Max Working Pressure	210 BAR
Ports	1/8" NPT & 3/8" BSP
Materials	316 S.S.

Company	Product	Approved by	Date
Alan Green	Hydro-Lek Limited, Unit 4, Walker Drive Hogwood Lane Industrial Estate Fritcham Road, Berks. RG40 4QZ Tel: 01298 373883 Fax: 01298 373815	Alan Green	19/01/2005
Cutter Assembly			HLK-33600
Edition			1 / 1
Sheet			0 / 1