



HYDRO-LEK

REMOTE HANDLING SPECIALISTS




HLK-7020 4-Way Valve Pack:

The HLK-7020 4-Way Valve Pack is one of the most compact units available. As with the power packs it is housed in a 100mm diameter housing with four bi-directional solenoid valves. Each controlled via HLK solenoid coils, which can be wound to suit many voltage supplies. A full back EMF diode board is also included inside the housing. All flow and connection ports are situated at the end of the manifold, which enables the units to be mounted in very confined spaces, especially useful on small ROV's or tooling packages.

Specification:

Dimensions	Housing length	215mm
	Housing diameter	100mm
Weight	Weight in air	4Kg
	Weight in water	2.5Kg
Functions	4 x Bi-directional solenoid valves	
Voltage	Standard 24V DC	
Hydraulics	Max working pressure	210 bar
Porting	7/16 SAE	
Construction	HE 30 Aluminium hard anodised	

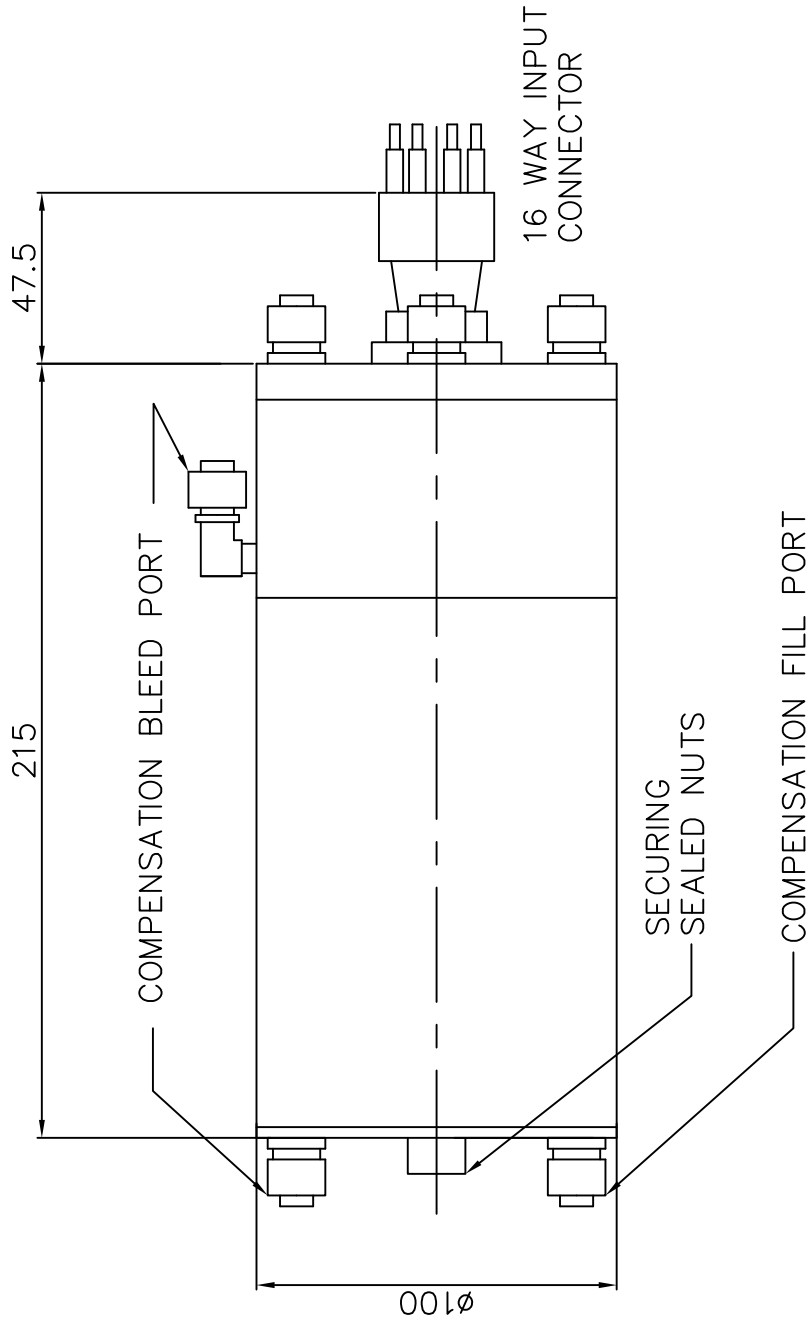

SPECIFICATION

FUNCTION 4 x BI DIRECTIONAL SOLENOID VALVES
 VOLTAGE 24V DC
 MAX. WORKING PRESSURE 210 BAR
 WEIGHT IN AIR 4 KG
 WEIGHT IN WATER 2.5 KG
 PORTS 7/16" SAE
 MATERIALS: - HE 30 HARD ANODISED ALUMINIUM

HYDRO-LEK LTD.	HLK-7020-1 VALVE PACK
ISS. DATE: -	MAT: - ASSEMBLY
CHKD BY: -	REV. NO: - 1
DRAWN BY: - JW 19/8/99	DRG. NO: - CMR 7020/DATA
	C.M. INNOVATIONS LTD.